

# NDCW Series

## High Temperature Combined Type Supercapacitor



### FEATURES


- COMBINED TYPE CONSTRUCTION
- HIGH TEMPERATURE (+85°C FOR DISCHARGE)
- GREEN MEETING RoHS REQUIREMENTS
- LONG CHARGE-DISCHARGE CYCLE LIFE
- LOW LEAKAGE CURRENT, SUITABLE FOR MAINTAIN RTC

### NDCW CHARACTERISTICS


Rated Voltage Rating	5.5VDC
Rated Capacitance Range	0.22 ~ 25F (220,000 $\mu$ F ~ 25,000,000 $\mu$ F)
Operating Temp. Range	-40°C ~ +85°C
Capacitance Tolerance	$\pm 20\%$ (M), +80%/-20% (Z)
Load Life @ +85°C 1,000 hours	$\Delta C$ : Less than or equal to 30% of the initial value
	ESR: Less than or equal to 4 times the initial value
	Appearance: No leakage or mechanical damage

### NDCW CASE DIMENSIONS (mm)

NIC P/N	DIMENSIONS (mm)						
	L $\pm 1.0$	W $\pm 1.0$	H $\pm 2.0$	F $\pm 0.5$	d $\pm 0.05$	F1 $\pm 2.0$	F2 $\pm 2.0$
NDCW224Z5.5V6.5X13.8BF	13.5	6.5	13.8	9.0	0.5	19.0	24.0
NDCW334Z5.5V6.5X13.8BF	13.5	6.5	13.8	9.0	0.5	19.0	24.0
NDCW474M5.5V6.5X13.8BF	13.5	6.5	13.8	9.0	0.5	19.0	24.0
NDCW504M5.5V6.5X13.8BF	13.5	6.5	13.8	9.0	0.5	19.0	24.0
NDCW105M5.5V8.5X17BF	17.0	8.5	17.0	12.0	0.6	19.0	24.0
NDCW155M5.5V8.5X21BF	17.0	8.5	21.0	12.0	0.6	19.0	24.0
NDCW205M5.5V8.5X21BF	17.0	8.5	21.0	12.0	0.6	19.0	24.0
NDCW205M5.5V8.5X25BF	17.0	8.5	25.0	12.0	0.6	19.0	24.0
NDCW255M5.5V8.5X25BF	17.0	8.5	25.0	12.0	0.6	19.0	24.0
NDCW255M5.5V10X21BF	21.0	10.0	21.0	15.5	0.6	19.0	24.0
NDCW305M5.5V8.5X25BF	17.0	8.5	25.0	12.0	0.6	19.0	24.0
NDCW305M5.5V10X21BF	21.0	10.0	21.0	15.5	0.6	19.0	24.0
NDCW355M5.5V10X21BF	21.0	10.0	21.0	15.5	0.6	19.0	24.0
NDCW505M5.5V10X26BF	21.0	10.0	26.0	15.5	0.6	21.0	27.0
NDCW505M5.5V13X22BF	26.0	13.0	22.0	18.0	0.6	22.0	28.0
NDCW755M5.5V13X22BF	26.0	13.0	22.0	18.0	0.6	22.0	28.0
NDCW755M5.5V13X27BF	26.0	13.0	27.0	18.0	0.6	21.0	27.0
NDCW106M5.5V13X27BF	26.0	13.0	27.0	18.0	0.6	21.0	27.0
NDCW106M5.5V16X28BF	33.0	16.0	28.0	24.0	0.8	21.0	27.0
NDCW156M5.5V16X33BF	33.0	16.0	33.0	24.0	0.8	21.0	27.0
NDCW256M5.5V18X43BF	37.0	18.0	43.0	28.0	0.8	23.0	28.0

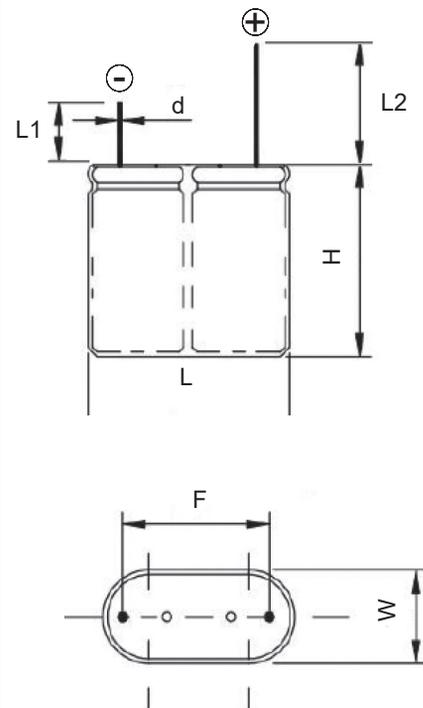

### PART NUMBER SYSTEM

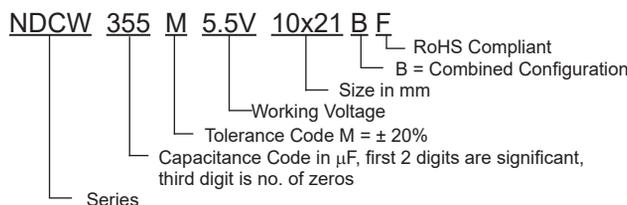

# NDCW Series

## High Temperature Combined Type Supercapacitor



### NDCS ELECTRICAL SPECIFICATIONS

NIC P/N	Capacitance (F)	Voltage (VDC)	Tolerance (%)	ESR 1KHz (mΩ @25°C) Max.	Peak Current (A @ 25°C<1s) Max.	LC after 72h (mA@ 25°C)	Stored Energy (mWh) Max.
NDCW224Z5.5V6.5X13.8BF	0.22	5.5	+80%/-20% (Z)	1000	0.58	0.008	0.92
NDCW334Z5.5V6.5X13.8BF	0.33	5.5	+80%/-20% (Z)	1000	0.68	0.008	1.39
NDCW474M5.5V6.5X13.8BF	0.47	5.5	± 20% (M)	1000	0.88	0.008	1.97
NDCW504M5.5V6.5X13.8BF	0.5	5.5	± 20% (M)	1000	0.88	0.008	2.10
NDCW105M5.5V8.5X17BF	1.0	5.5	± 20% (M)	360	1.96	0.013	4.20
NDCW155M5.5V8.5X21BF	1.5	5.5	± 20% (M)	270	3.03	0.017	6.30
NDCW205M5.5V8.5X21BF	2.0	5.5	± 20% (M)	220	3.93	0.020	8.40
NDCW205M5.5V8.5X25BF	2.0	5.5	± 20% (M)	220	3.72	0.020	8.40
NDCW255M5.5V8.5X25BF	2.5	5.5	± 20% (M)	170	4.74	0.020	10.50
NDCW255M5.5V10X21BF	2.5	5.5	± 20% (M)	200	4.58	0.020	10.50
NDCW305M5.5V8.5X25BF	3.0	5.5	± 20% (M)	160	5.57	0.025	12.60
NDCW305M5.5V10X21BF	3.0	5.5	± 20% (M)	180	5.36	0.025	12.60
NDCW355M5.5V10X21BF	3.5	5.5	± 20% (M)	160	6.31	0.030	14.70
NDCW505M5.5V10X26BF	5.0	5.5	± 20% (M)	120	7.86	0.050	21.01
NDCW505M5.5V13X22BF	5.0	5.5	± 20% (M)	120	7.86	0.050	21.01
NDCW755M5.5V13X22BF	7.5	7.5	± 20% (M)	120	10.86	0.065	31.51
NDCW755M5.5V13X27BF	7.5	7.5	± 20% (M)	110	10.06	0.065	31.51
NDCW106M5.5V13X27BF	10	5.5	± 20% (M)	100	12.50	0.080	42.01
NDCW106M5.5V16X28BF	10	5.5	± 20% (M)	90	13.75	0.060	42.01
NDCW156M5.5V16X33BF	15	5.5	± 20% (M)	70	17.55	0.78	63.02
NDCW256M5.5V18X43BF	25	5.5	± 20% (M)	60	25.00	1.00	105.33

Part Number	Quantity per Tray
NDCW224Z5.5V6.5X13.8BF	80
NDCW334Z5.5V6.5X13.8BF	80
NDCW474M5.5V6.5X13.8BF	80
NDCW504M5.5V6.5X13.8BF	80
NDCW105M5.5V8.5X17BF	48
NDCW155M5.5V8.5X21BF	48
NDCW205M5.5V8.5X21BF	48
NDCW205M5.5V8.5X25BF	48
NDCW255M5.5V8.5X25BF	48
NDCW255M5.5V10X21BF	40
NDCW305M5.5V8.5X25BF	40

Part Number	Quantity per Tray
NDCW355M5.5V10X21BF	40
NDCW505M5.5V10X26BF	30
NDCW505M5.5V13X22BF	32
NDCW755M5.5V13X22BF	32
NDCW755M5.5V13X27BF	20
NDCW106M5.5V13X27BF	20
NDCW106M5.5V16X28BF	20
NDCW156M5.5V16X33BF	16
NDCW256M5.5V18X43BF	40 (Plastic Bag)

# NDCW Series


## High Temperature Combined Type Supercapacitor



### NDRH ENVIRONMENTAL CHARACTERISTICS

ITEM	REQUIREMENT		TEST CONDITION
Endurance	$\Delta C$	Less than or equal to 30% of the initial measured value	Applied voltage: 5V Temperature: +85°C ± 2°C Test Duration:1000 hours
	ESR	Less than or equal to 4 times the initial measured value	
	Appearance	No leakage or mechanical damage	
Cycle Life	$\Delta C$	Less than or equal to 30% of the initial measured value	At 25°C, charge to the rated voltage with constant current, stand for 5s, discharge to 50% voltage with constant current, stand for 5s, cycle 500000
	ESR	Less than or equal to 4 times the initial measured value	
Humidity Characteristics	$\Delta C$	Within 30% of the rated specification	Temperature: +40°C ± 2°C Relative humidity: 90~95%RH Test Duration: 240 hours
	ESR	Less than or equal to 4 times the initial measured value	
	Appearance	No leakage or mechanical damage	
Temperature Cycle	$\Delta C$	Less than or equal to 10% of the initial measured value	Temperature cycle: -40°C ± 2°C →normal temperature →+85°C ± 2°C →normal temperature Number of Cycles: 5
	Appearance	No mechanical damage or leakage	
Low Temperature Storage Characteristics	$\Delta C$	Within 10% of the rated specification	Applied Voltage: 0v Temperature: -40°C ± 2°C Test Duration:96 hours
	ESR	Less than or equal to 2 times the initial measured value	
	Appearance	No leakage or mechanical damage	
High Temperature Storage Characteristics	$\Delta C$	Within 10% of the rated specification	Applied Voltage: 0v Temperature: +85°C ± 2°C Test Duration:96 hours
	ESR	Less than or equal to 2 times the initial measured value	
	Appearance	No leakage or mechanical damage	
Self-Discharge (Voltage Holding Characteristics)	The self-discharge cut off voltage is greater than or equal to 80% of the rated voltage.		Charging process: Normal temperature, no load, rated voltage charge 8 hours Placement process: Temperature less than or equal to 25 °C, relative humidity less than 60% RH, open 24 hours
Lead Strength	No damage to the outlet		DL/T1652-2016
Solderability	More than 3/4 of the terminal surface is covered by a tin layer		DL/T1652-2016

**FLOW (WAVE) SOLDERING PROFILE**

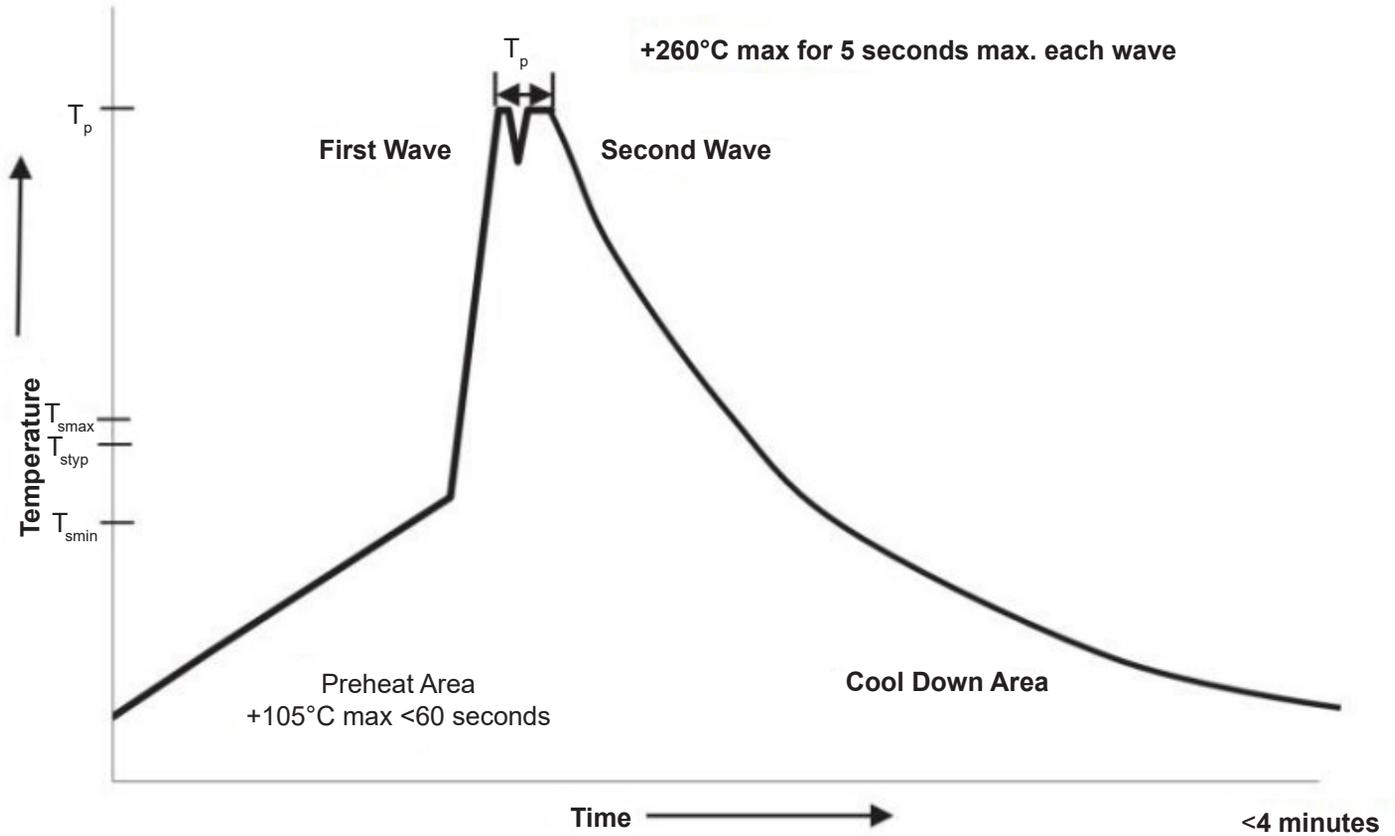

Note: The capacitor cannot be powered on immediately after wave soldering and must be left standing for more than 12 hours before use.